



Image is for representative purposes only, actual may differ

OVERVIEW

The PINIX line is a series of advanced Bluetooth Low Energy 5.x beacon devices using multi standard beacon technology. The PINIX TOG-2 is a waterproof beacon tag specially conceived for advanced solutions for positioning and tracking applications for movable assets. It features an ultra-low power consumption chipset Nordic nRF52 series. PINIX TOG-2 Beacon tag is a durable water-resistant beacon tag and it is widely used in supermarkets, warehouses, and smart-building settings.

The PINIX TOG-2 comes with a downloadable SDK with an extensive library for easy integration into a wide range of location based and navigation-based applications. It also includes a wide range tool facilitating optimal setup & installation.

BLUETOOTH RADIO

Type:
Bluetooth Low energy 5.0

- Advertisement:**
- iBeacon
 - Eddystone (UID & TLM)
 - sBeacon (Sentrax Proprietary)

Advertisement Interval:
100ms to 10seconds

Frequency:
2.4GHz

Transmit Power:
+4dBm to -20 dBm

Antenna Type:
PCB antenna, Omni Directional

BATTERY

Battery type:
1xCR2477, 1000mAh, Replaceable

Battery Life:

(Advertisement Rate)	(Battery Life)
500ms	2 year 2 months
1000ms	3 year 4 months

SENSORS AND INTERFACES

Motion Sensing	3-Axis Accelerometer
Button	1 internal on/off button

CERTIFICATIONS

CE (Pending)

ENCLOSURE

Material:	Color:	Weight:
ABS	White	20.2g

Dimensions:
ø39*15.5mm


Accessories:
Double sided tape

Protection Class:
IP67

OPERATING ENVIRONMENT

Temperature Range	-20°C to 60°C
Operating Humidity	90%

SENTRAX DEVICE MANAGER (SDM)

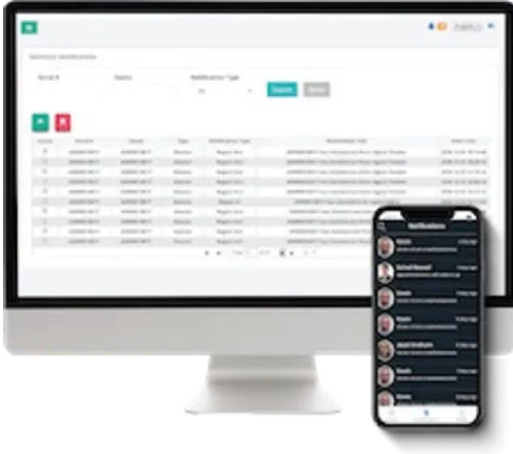

With the Sentrax Device Manager (SDM) application you can scan for nearby configurable PINIX beacons, display their battery status, view their settings and make modifications to those settings. Configuration of beacons are password protected with a four (4) digit user defined PIN.

As an added safety feature, the beacons can only be configured within a period of 15 minutes after installing the batteries or can be manually triggered into configuration mode by pressing the reset button on the Tag. However, this time duration can be increased through the settings to up to 3 weeks or more.

APPLICATION AREAS

- Indoor Localization
- Assets Tracking
- Location Based Services
- Super Market
- Museum

CAUTION



- Risk of explosion if battery is replaced by an incorrect type.
- Dispose of used batteries according to the instructions
- Glue should be used to close the enclosure if opened by use

RECYCLING

This product bears the selective sorting symbol for Waste electrical and electronic equipment (WEEE). This means that this product must be handled pursuant to European directive 2012/19/EU in order to be recycled or dismantled to minimize its impact on the environment.

All product names, logos, and brands are property of their respective owners. All company, product and service names used in this datasheet are for identification purposes only. Use of these names, logos, and brands does not imply endorsement.

